
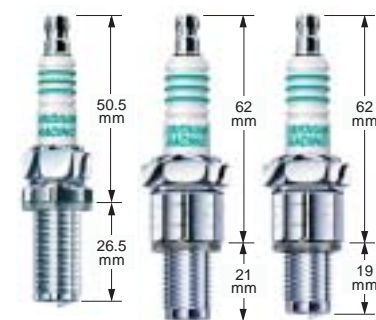
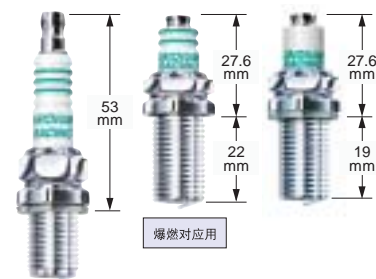
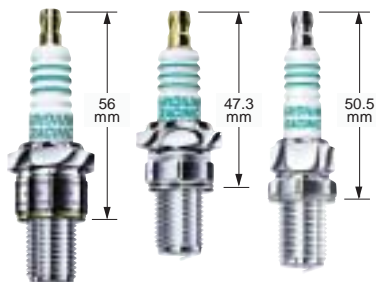


# IRIDIUM RACING CROSS REFERENCE

DENSO		NGK						
IRIDIUM POWER	IRIDIUM RACING	火花塞形状	螺纹口径 (mm)	长度 (mm)	六角二面宽 (mm)	电阻	形状	规格
IW□		④ D	14	19	20.6		BP-E	R4304A-□
	IW01/IW06-□(注1)	④ A	14	19	20.6		B-E	B□EGP
IW□		④ D	14	19	20.6		B-E	B□EGV
IW□		④ D	14	19	20.6		B-E	R4118S-□
	IW01/IW06-□(注1)	④ A	14	19	20.6		B-E	R4630A-□
	IW01/IW06-□(注1)	④ A	14	19	20.6	R	B-E	R6252K-□
	IW01/IW06-□(注1)	④ A	14	19	20.6	R	B-E	R6918B-□
	IW01/IW06-□(注1)	④ A	14	19	20.6	R	B-E	R6918C-□
IW□		④ D	14	19	20.6	R	B-E	R6021E-□
	IW01/IW06-□(注1)	④ A	14	19	20.6	R	B-E	R6385-□P
	IW01/IW06-□(注1)	④ A	14	19	20.6	R	B-E	R7376-□(Ir)
			14	19	20.6		B-E 半沿面	R5649-□
			14	19	20.6	R	B-E 半沿面	R6712-□
	IWM01-□	⑤ A	14	19	20.6		B-E 小型	R5184-□
			14	19	20.6	R	B-E 小型	R5300A-□
			14	19	20.6	R	B-E 小型	R5300N-□
			14	19	20.6	R	B-E 小型	R5540F-□
	IWM01-□	⑤ A	14	19	20.6	R	B-E 小型	R6179A-□P
			14	22	20.6	R	B-E 小型	R6179C-□PA
			14	22	20.6	R	B-E	R7376B(Ir)
	IA01-□	⑧ A	14	22	16	R	BC-E 小型	R6120A-□
	IA01-□	⑧ A	14	22	16	R	BC-E 小型	R7282A-□(Ir)
	IAE01-□	⑨ A	14	19	16	R	BC-E 小型	R6120-□
	IAE01-□(注2)	⑨ A	14	19	16	R	BC-E 小型	R6120C-□
	IAE01-□(注2)	⑨ A	14	19	16	R	BC-E 小型	R6120M-□
	IAE01-□	⑨ A	14	19	16	R	BC-E 小型	R7282-□(Ir)
	IAE01-□(注2)	⑨ A	14	19	16	R	BC-E 小型	R7282C-□(Ir)
	IAE01-□(注2)	⑨ A	14	19	16	R	BC-E 小型	R7282M-□(Ir)
IK□		⑥ D	14	19	16	R	BK-E ISO	R6888A-□
IK□		⑥ D	14	19	16		BK-E ISO	R7112-□
IK□		⑥ D	14	19	16	R	BK-E ISO	R7113-□
IK□		⑥ D	14	19	16	R	BK-E ISO	R7433-□(Ir)
IK□		⑥ D	14	19	16		BK-E ISO	R7114-□
IK□		⑥ D	14	19	16	R	BK-E ISO	R7115-□
	IK01-□	⑥ A	14	19	16		BK-E ISO	R7116-□
	IK01-□	⑥ A	14	19	16	R	BK-E ISO	R7117-□
	IK02-□	⑥ B	14	19	16		BK-E ISO	R7118-□
	IK02-□	⑥ B	14	19	16	R	BK-E ISO	R7119-□
	IK01-□	⑥ A	14	19	16	R	BK-E ISO	R7434-□(Ir)
	IK02-□	⑥ B	14	19	16	R	BK-E ISO	R7279-□(Ir)
			14	19	16	R	BK-E 半沿面	R6601-□
			14	19	16		BK-E 半沿面	R6711-□
IQ□		⑦ D	14	19	16	R	BCP-E	R7435-□(Ir)
IQ□		⑦ D	14	19	16		BCP-E	R7232-□
IQ□		⑦ D	14	19	16	R	BCP-E	R7233-□
IQ□		⑦ D	14	19	16		BC-E	R7234-□
IQ□		⑦ D	14	19	16	R	BC-E	R7235-□
	IQ01-□	⑦ A	14	19	16		BC-E	R7236-□
	IQ01-□	⑦ A	14	19	16	R	BC-E	R7237-□
	IQ02-□	⑦ B	14	19	16		BC-E	R7238-□
	IQ02-□	⑦ B	14	19	16	R	BC-E	R7239-□
	IQ01-□	⑦ A	14	19	16	R	BC-E	R7436-□(Ir)
			14	19	16		BC-E 半沿面	R5883-□
			14	19	16	R	BC-E 半沿面	R6690-□
IKH□		⑩ D	14	26.5	16	R	LFR	R7437-□(Ir)
	IKH01-□	⑩ A	14	26.5	16	R	LFR	R7438-□(Ir)
IWF□		— D	14	12.7	20.6		B-H	R5525-□
			14	12.7	20.6		B-H	R5530-□
	IRE01-□	③ B	14	21.5	20.6	R	ROTARY	R6725-□
	IRE01-□	③ B	14	21.5	20.6	R	ROTARY	R7420-□(Ir)
			14	21.5	20.6		ROTARY 沿面	T813J-N13
	IRL01-□	⑪ A	14	21	20.6	R	ROTARY RX-8(L)	R7440A-□L(Ir)
	IRT01-□	⑫ A	14	19	20.6	R	ROTARY RX-8(T)	R7440B-□T(Ir)
	IXU01-□(注3)	② A	12	19	18		D-E	R216-□
IX□(注3)	IXU01-□(注3)	② D, ② A	12	19	18		D-E	R217-□
			12	21	18		D-Z	R2188-□
			12	19	16	R	DC-E 半沿面	R2349-□
	IXU01-□(注3)	② A	12	19	16	R	DC-E	R2525-□
			12	19	16		DC-E 半沿面	R2430-□
IU□A	IU01-□	① A	10	19	16		C-E	R016-□
	IU01-□	① E	10	19	16		C-E	R017-□
	IU01-□	① A	10	19	16		C-E	R0373A-□(Ir)
			10	19	16		C-E 半沿面	R0045G-□
	RU01-□	① C	10	19	16		C-E 半沿面	R0045J-□
	RU01-□	① C	10	19	16	R	C-E 半沿面	R0045Q-□
	IU01-□	① A	10	19	16	R	C-E HALF THREAD	R0379A-10(Ir), R0409B-□
IUF□(A)		— D, — E	10	12.7	16		C-H	R0161-□
IY□		— D	8	19	12.7	R	E-EH 半沿面	R847-□

(注1) IW06为无电阻型。(注2) 拆卸垫圈时请使用专用工具。  
 (注3) IX□8、IX□和IX01-□为双六角的18mm和16mm,安装时可互换。  
 □表示为热值。

## 全体形状

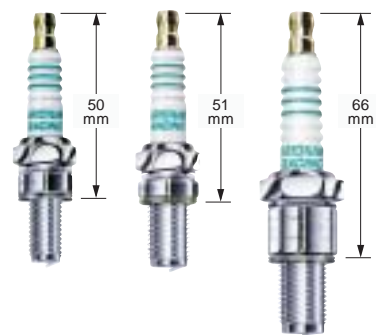

## 电极形状



钛金赛车火花塞